

**CHANGE ORDER**

PROJECT: Ledyard Center Streetscape	CHANGE ORDER NUMBER: 001
CONTRACTOR: Pazz Construction	DATE: 04/7/2016

The contract is changed as follows:

1. 20 light poles changed to Norfolk style decorative pole in lieu of original specified light poles. See attached specifications.

Deduct (\$2,500.00)

Original Contract Sum .....\$448,500.00


Net Change by Previous Change Orders.....\$0.00

Contract Sum prior to this Change Orders.....\$448,500.00


Amount of this Change Order Deduct..... (\$2,500.00)

New Contract Sum including this Change Order..... \$446,000.00


This document, when signed by all parties, shall become an amendment to the Contract Documents and all provisions of the Contract shall apply hereto.

  
\_\_\_\_\_  
ARCHITECT

4/6/18  
\_\_\_\_\_  
DATE


  
\_\_\_\_\_  
CONTRACTOR

4/6/18  
\_\_\_\_\_  
DATE

  
\_\_\_\_\_  
OWNER

4/12/16  
\_\_\_\_\_  
DATE

# Norfolk Style Decorative Pole

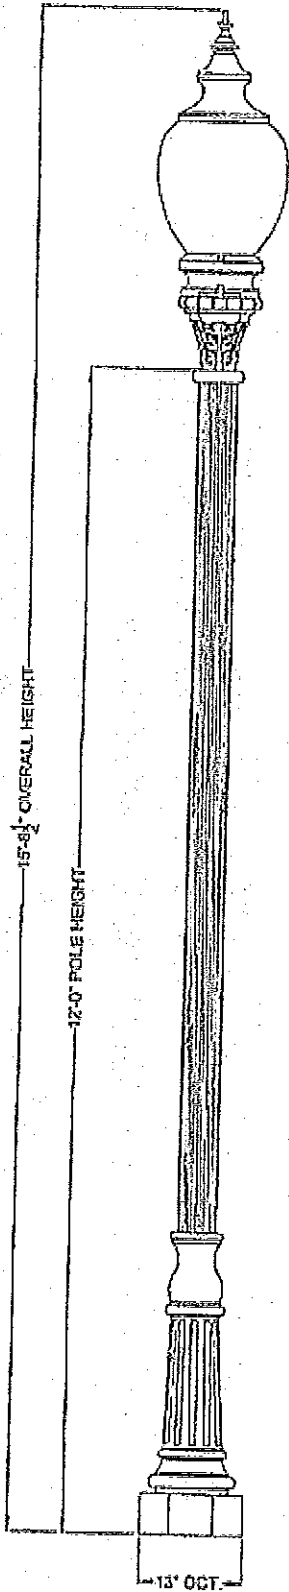

### LUMINAIRE SPECIFICATIONS


CATALOG NO.:	K116R-B3AR-V-03(SSL)1038-120V-K14-QFCI-SST
STYLE:	WASHINGTON LED ACORN SOLID SPUN TOP
GLOBE MOUNTING:	ROTALOCK
OPTICAL SYSTEM:	DAFFLED ARRAY ACRYLIC RIPPLED
IES CLASS:	TYPE V
INPUT WATTAGE:	89W SOLID STATE LIGHTING
SERIES:	1038
CCT:	5000K
LINE VOLTAGE:	120/277V
POLE ADAPTOR:	K14
PANT:	TEXTURED BLACK
OPTIONS:	QUICK DISCONNECT
QUANTITY:	10

### LAMP POST SPECIFICATIONS

CATALOG NO.:	AGDP-H-12
STYLE:	NORFOLK
POLE HEIGHT:	12'-0"
BASE:	13" OCTAGONAL
THICK:	3-1/2" O.D. x 3" TALL
MATERIAL:	HEAVY WALL CAST ALUMINUM 356 ALLOY SHAFTS 5" O.D. FLUTED EXTRUDED ALUMINUM
ACCESS DOOR:	LOCATED IN BASE
ANCHOR BOLTS:	1/2" x 24" x 3" HOOK WASHERS, 4 NUTS INCLUDED FULLY GALVANIZED
BOLT PROJECTION:	3" ABOVE FOUNDATION
BOLT CIRCLE:	9-1/2" DIAMETER
FINISH:	GLOSS BLACK
QUANTITY:	10

*Ledyard P.D*  
*3/10/16*

### ANCHOR BOLT DETAIL



9-1/2" O.A. BOLT CIRCLE  
FOR 3/4" ANCHOR BOLTS